


RoHS

IP67

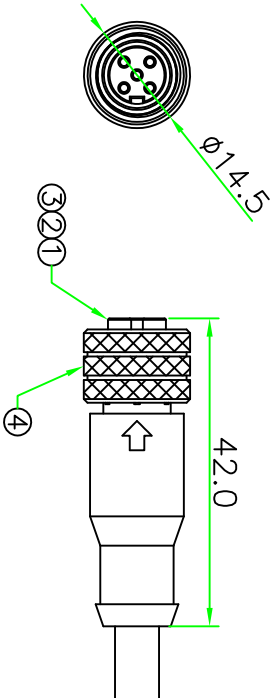


NOTES:
1. ELECTRICAL CHARACTERISTICS:
CURRENT RATING: 2A / 5A
TEMPERATURE RANGE: -25°C TO +85°C
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
2. HOW TO ORDER: A12X-M2XXSN

03 - 3 PIN 08 - 8 PIN
04 - 4 PIN 12 - 12 PIN
05 - 5 PIN
D - CURRENT RATING 5A
N - CURRENT RATING 2A

REV.	DESCRIPTION	DATE
A	ISSUE	Feb/26/2009

4	RING NUT	BRASS, NICKEL PLATED.		1		
3	O-RING	VITON.	BLACK	1		
2	CONTACT	BRASS , Female pin ,6 u" Gold plated .		N		
1	CONNECTOR	M12 Female connector Insert.	BLACK	1		
No.	PART NAME	DESCRIPTION	COLOR	QTY	REMARKS	

Pin Assignment Front View

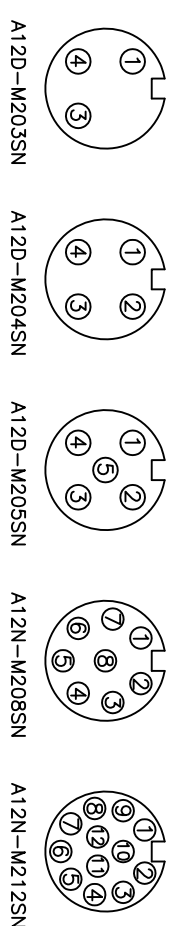

HOLIN® HTP ASIA TECHNOLOGY CO.,LTD.
禾凌科技股份有限公司

SCALE	UNIT:mm	TITLE
1:1		M12 A-Coding FEMALE molded cable Ass'y
UNLESS OTHERWISE SPECIFIED TOLERANCES:		
X ± 0.25	XX ± 0.1	P/N:
XXX ± 0.05	ANGLE ± 1°	A12x-M2xxSN
REV.	SHEET	DWG.NO:
A	1/1	A12x-M2xxSN

DR. jae
CH. EJE
AP.